

Sewerooter T-4™

Performance, Durability, Portability

Improved Performance

The new Sewerooter T-4 does a better job of clearing inside drain lines up to 100 ft. long with 9/16" Flexicore cable. It has more torque than traditional 1/2 inch cables, yet it can be used to clear the same 3" to 4" drain lines. Need to clear tree roots too? Just switch drums to a 75 ft. x 5/8" Flexicore cable to clear 3" to 6" lines.

Added Durability

The heavy-duty variable speed Power Cable Feed drives and retracts 9/16" and 5/8" cables at up to 20 ft. per minute. To adjust to different cable sizes, simply turn the knob on top of the feed. The screwdriver stays in the tool box.


The heavy-duty reinforced frame and drum support shaft takes rough handling in the field. The 1/3 hp capacitor motor has plenty of power to drive more than 100 ft. of cable. And the unique self-aligning Flexitube™ distributor tube reduces the risk of cable tangling in the drum.

Greater Portability

V-Belt stair climbers make it easier for you to take the machine up a flight of stairs by yourself. The handle is tall enough to make it easy to transport to the job, yet quickly folds to take less room in your truck. Big ten inch heavy-duty semi-pneumatic wheels roll easily over rough terrain. And a truck loading wheel in the handle makes it easier for one person to lift the machine into a truck bed.



Flexicore® Cable Wire Rope Center Construction

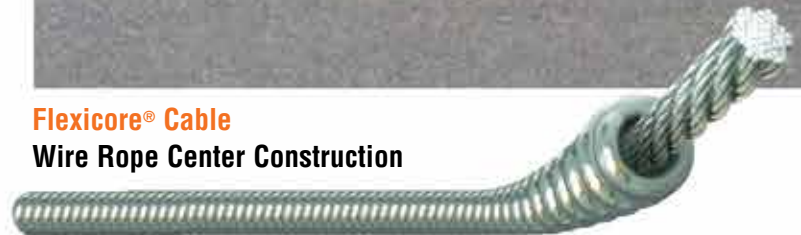

Heavy-gauge wire coiled tightly around 49-strand aircraft-type wire rope and heat treated. It has unequalled strength and the right amount of flexibility. So tough it carries a one-year warranty against defect or breakage.

Flexicore Patent Nos. 2,244,735 and 2,849,870



Power Cable Feed

The Sewerooter T-4's power cable feed is a real labor saver. It enables you to vary feeding speed in and out of the line more easily and also gives you better control when working through tough stoppages. The Guide Tube reduces whipping and drag while protecting your hands from the spinning cable. Five foot Guide Tube Extensions are available.

Folding Handle

The handle is tall enough to make it easy to move to the job, yet quickly folds to take less room in your truck.



Stair Climbers and Truck Loading Wheel

Big ten inch heavy-duty semi-pneumatic wheels roll easily over rough terrain to and from the job. V-Belt stair climbers let you take the machine up a flight of stairs by yourself. Truck loading wheel in the handle makes it easier for one person to lift the machine into a truck bed.

Specifications:

Weight:

92 lbs. (42 kg) without cable.

Dimensions:

27" (68.5 cm) deep,
18-1/2" (47 cm) wide,
46" (117 cm) high; 26" (66 cm) with handle folded down.

Drum Capacity:

100 ft x 9/16" (30 m x 14.2).
75 ft. x 5/8" (22.5 m x 15.8).

Drum Removal:

Remove one bolt and slide drum off shaft.

Motor:

1/3 hp with capacitor, forward-off-reverse switch
20 ft. power cord and ground fault circuit interrupter.

Foot Switch:

Pneumatic, with no electrical contact between
pedal and motor.

Power Cable Feed:

Drives and retracts at variable speed of up to 20 ft. per minute.

Wheels:

10" Heavy-duty wheels with roller bearings.

Wheel Brake:

Passive wheel brake system holds the machine in place
on the job or in the truck.

Stair Climbers:

Heavy-duty V-belts running on nylon rollers.

Truck Loading Wheel:

Enables one person to lift machine onto bed of truck.

Cutter Holder:

Cutter Holder on the frame keeps all the cutters within easy reach.

Leather Gloves:

With double-reinforced palm, for hand protection when
guiding cable.

Cables:

Left-wound Flexicore® wire rope center 5/8" diameter
for 3" to 6" lines; 9/16" diameter for 3" to 4" lines.
(Not for roots).

Cutters:

See Parts and Accessories on page 30.

